



MULTIPOINT BOREHOLE EXTENSOMETER



The DDE-7000 Series Borehole Extensometer Electrical/Mechanical (E/M), single or Multi-Point Borehole Extensometers are used to accurately measure longitudinal displacement in rock masses or concrete boreholes. It is particularly useful for distinguishing deep seated movements from surface spalling, which is of value in assessing the need for or determining the efficiency of a rock bolting system. The rugged low cost rod extensometer is designed to be easily installed in difficult locations.


FEATURES:

- Easy to install
- Standard design to use mechanically/electronically
- Highly accurate when used with vibrating wire displacement sensors
- In built Thermistor and gas discharge tube
- Individual sensors for multi-point applications
- Light weight

TYPICAL APPLICATION:

- Deformation around tunnels. Mines and other excavations
- Settlement of structures
- Stability of natural and cut slopes
- Deformation in dams and embankments
- Displacement of structures



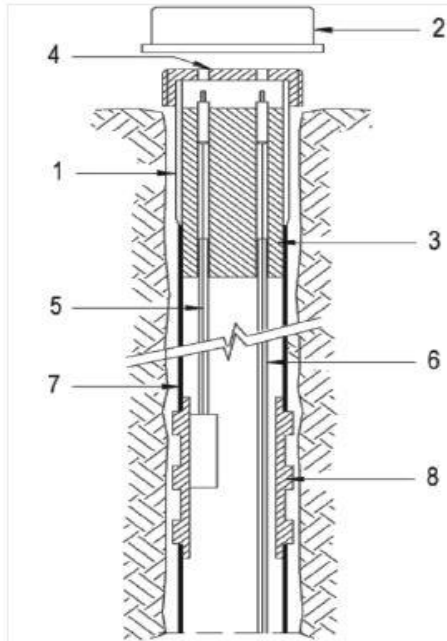

- 1: Stainless steel tube
- 2: Protective cap
- 3: Rod guide tube
- 4: Reference plane
- 5: Spring steel rods
- 6: Semi-rigid plastic tube
- 7: External polyethylene sheath
- 8: Ribbed steel anchors

DESCRIPTION:

The DDE-7000 Series E/M Borehole Extensometer is comprised of a group of 1 to 6 stainless steel/fiber rods individually sheathed in a protective rigid PVC pipe and attached to an anchor. A reference head, anchored at the surface terminate the protective PVC pipe. Movement of the anchor relative to the head changes the distance between the head and the force end of the rod. Two types of head are available. The model (Mechanical) uses a dial or depth gauge to measure change in distance. The depth gauge has an engraved scale or digital readout. The model with remote sensor uses simultaneous Vibrating Wire displacement transducers DDE 8000 to measure the change in distance Single-Point and Multi point head configuration is available for both models Vibrating Wire displacement transducers has a built-in thermistor facility to read temperature. All displacement transducers are available to monitor anchor movements remotely and are sealed against moisture and water intrusion. A watertight overall housing seals the former; the transducer casing and housing doubly seals the latter. Both head terminate with protective capes that are removable. The heads are grouted in place at the borehole collar.

**READING AND INTERPRETATION:**

Both electrical and mechanical readings can be taken. Mechanical readings are taken with either a dial gauge or depth gauge. Electrical readings are obtained from the output of the DDE-8000 Vibrating Wire type transducers.

SPECIFICATIONS (MATERIALS):

SERIES	<u>DDE-7000-BSE</u>	<u>DDE-7000-BME</u>
EXTENSOMETER ROD	Stainless Steel	Mild Steel
REFERENCE HEAD	Stainless Steel	Steel Casting
CASING	PVC/Aluminium	PVC/Aluminium
COVER	PVC/Aluminium	Mild Steel

SPECIFICATIONS:

Borehole Diameter	38mm	48mm	61mm	76mm	101mm
Max. No. of Points	1	2-3	3-4-5	3-4-5	5-6
Instrument	Dial Gauge	Depth Gauge	Vibrating Wire	Vibrating Wire	Vibrating Wire
Measuring Range	0-50mm	0-150mm	25,50,75mm	25,50,75mm	25,50,75,100
Linearity	0.05%	0.05%	1%	Typically 1%	Less Than 1%
Operating Temperature	0°-60°C	0°-60° C	-20° to 60° C	-20° to 60° C	-20° to 60° C
Cable			4 Core Shielded	4 Core Shielded	4 Core Shielded
Thermistor 3KOhm	Included				
Electrical Surge Protector	Optional				





Data Digger Equipment

Data Digger Equipment

568 K/240 Krishnapalli, Alambagh, Lucknow. PIN 226005

GST: 09AFEPB9198K1ZW

Website: www.datadigger.co.in

E-mail: info@datadigger.co.in

Contact: +91-7880650032, +91-7505751181

SINGLE POINT MECHANICAL ROD EXTENSOMETERS

Model DDE-7000-1

SPECIFICATION

Standard Range up to 100 mm

Least Reading 0.025 mm

Borehole Diameter 35, 44, 51, 61mm

Maximum Length 10 m

MULTIPOINT MECHANICAL ROD EXTENSOMETER & V.W Displacement Sensors

Model DDE- 7002

SPECIFICATION

Borehole Diameter 76 mm or over

Maximum Length 100 m

EXTENSOMETER ANCHOR TYPE

Grout able Anchor: The preferred anchor for use in downward-directed boreholes.

Hydraulic Anchor : For use in rough boreholes in rock and soft ground

Snap-Ring Anchor : For use in hard or competent rock

READOUT INSTRUMENTS AND SENSORS

Digital Depth Micro-meter

Dial Indicator

VW Displacement Transducer

Standard Range up to 100 mm nominal



AN ISO 9001:2015 Certified Organization
Certificate No: 304920053008Q